


Accenditori per lampade da proiezione Ignitor for lamps projection

Mod. FCE200S

ACCENDITORI DA 150 A 300W PER LAMPADRE MSR-MSD-HMD-HTI-SN
IGNITERS FROM 150 TO 300W FOR MSR-MSD-HMD-HTI-SN LAMPS

CARATTERISTICHE CHARACTERISTICS

FREQUENZA:	50/60Hz
FREQUENCY:	50/60Hz
TENSIONE INNESCO	KV 2
PRIMER TENSION	KV 2
AMPERE	4A
AMPERE	4A
IMPULSI/PERIODO	≥ 6
IMPULSE/PERIOD	≥ 6
TEMPERATURA	C°-30..+90
TEMPERATURE	C°-30..+90

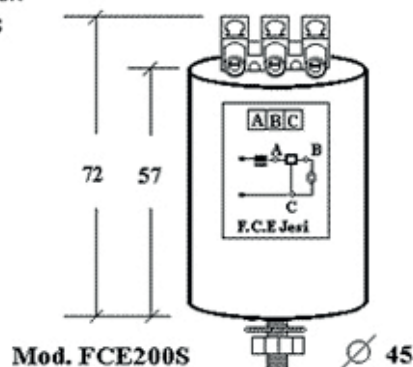


Mod. FCE200S

Mod. FCE575

WATT	150	250	400	500	575	660	700	1000	1200
SN		●		●		●		●	
HMI			●		●				
MSI					●				
MSR			●		●		●		●

CARATTERISTICHE CHARACTERISTICS

FREQUENZA:	50/60Hz
FREQUENCY:	50/60Hz
TENSIONE INNESCO	KV 4-5
PRIMER TENSION	KV 4-5
AMPERE	13,8A
AMPERE	13,8A
IMPULSI/PERIODO	≥ 6
IMPULSE/PERIOD	≥ 6
TEMPERATURA	C°-30..+90
TEMPERATURE	C°-30..+90

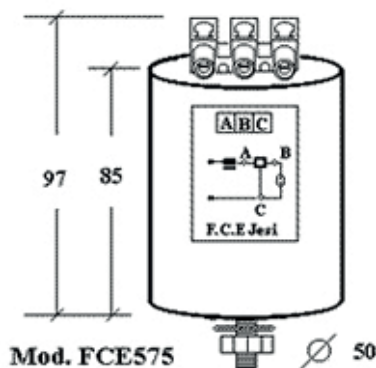


Mod. FCE575

Mod. FCE-ACC

WATT	150	250	400	500	575	660	700	1000	1200
HMI					●				●

CARATTERISTICHE CHARACTERISTICS

FREQUENZA:	50/60Hz
FREQUENCY:	50/60Hz
TENSIONE INNESCO	KV 5-9
PRIMER TENSION	KV 5-9
AMPERE	13,8A
AMPERE	13,8A
IMPULSI/PERIODO	≥ 6
IMPULSE/PERIOD	≥ 6
TEMPERATURA	C°-30..+90
TEMPERATURE	C°-30..+90

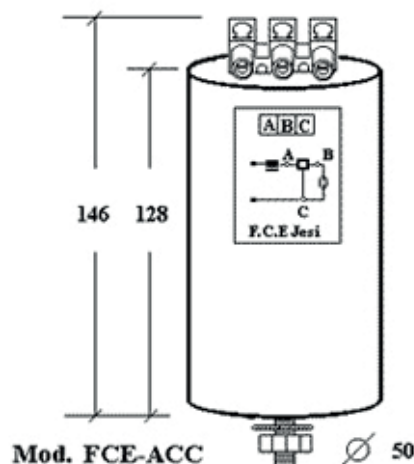

Mod. FCE-ACC