

# Trasformatori incapsulati in resina 10va

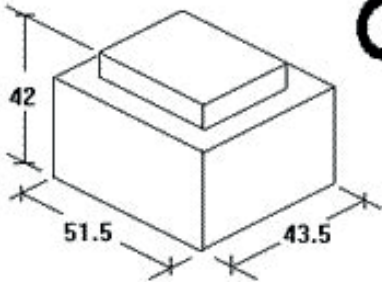

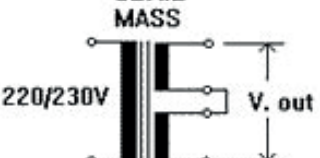
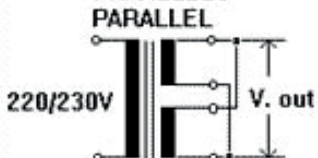
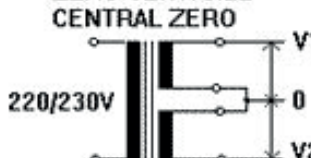
## Transformers encapsulated in resin 10va

Trasformatori di alimentazione per elettronica. Primario 220Vac. Due secondari uguali che si possono collegare in serie od in parallelo. In serie si raddoppia la tensione con la possibilità di avere anche lo zero centrale, (es. 12-0-12V).

In questo caso il trasformatore fornisce la corrente di un avvolgimento.

Nel collegamento in parallelo si raddoppia la corrente e rimane invariata la tensione.

*Power transformers for electronics. Primary 220Vac. Two secondary equal that can be connected in series or parallel. In series doubles the voltage with the possibility of having also the central zero, (eg 12-0-12V). In this case the transformer supplying the current of a winding. In parallel connection doubles the current and the voltage remains unchanged.*

<b>CONTENITORE</b> <b>BOX</b>			<b>FORATURA C.S. [ vista da sotto ]</b> <b>PERFORATION P.C. [ view pin side ]</b> 		
<b>POTENZA</b> <b>POWER</b>  <b>10VA</b>	<b>SCHEMI DI COLLEGAMENTO - CONNECTION SCHEME</b>				
<b>VOLT-CODICI</b> <b>VOLT-CODE</b>	<b>SERIE</b> <b>MASS</b> 	<b>PARALLELO</b> <b>PARALLEL</b> 	<b>ZERO CENTRALE</b> <b>CENTRAL ZERO</b> 		
<b>TENSIONI E CORRENTI MASSIME OTTENIBILI</b> <b>MAX GETTABLE CURRENTS AND VOLTAGES</b>					
<b>4,5+4,5V</b> <b>COD.020903</b>	<b>9V</b>	<b>1,100A</b>	<b>4,5V</b>	<b>2,200A</b>	<b>4,5-0-4,5V</b> <b>1,100+1,100A</b>
<b>6+6 V</b> <b>COD.020904</b>	<b>12V</b>	<b>0,800A</b>	<b>6V</b>	<b>1,600A</b>	<b>6-0-6V</b> <b>0,800+0,800A</b>
<b>7,5+7,5V</b> <b>COD.020905</b>	<b>15V</b>	<b>0,650A</b>	<b>7,5V</b>	<b>1,300A</b>	<b>7,5-0-7,5V</b> <b>0,650+0,650A</b>
<b>9+9V</b> <b>COD.020906</b>	<b>18V</b>	<b>0,500A</b>	<b>9V</b>	<b>1,000A</b>	<b>9-0-9V</b> <b>0,500+0,500A</b>
<b>12+12V</b> <b>COD.020907</b>	<b>24V</b>	<b>0,400A</b>	<b>12V</b>	<b>0,800A</b>	<b>12-0-12V</b> <b>0,400+0,400A</b>
<b>15+15V</b> <b>COD.020908</b>	<b>30V</b>	<b>0,300A</b>	<b>15V</b>	<b>0,600A</b>	<b>15-0-15V</b> <b>0,300+0,300A</b>
<b>18+18V</b> <b>COD.020909</b>	<b>36V</b>	<b>0,250A</b>	<b>18V</b>	<b>0,500A</b>	<b>18-0-18V</b> <b>0,250+0,250A</b>
<b>24+24V</b> <b>COD.020910</b>	<b>48V</b>	<b>0,200A</b>	<b>24V</b>	<b>0,400A</b>	<b>24-0-24V</b> <b>0,200+0,200A</b>