

Trasformatori incapsulati in resina 6va

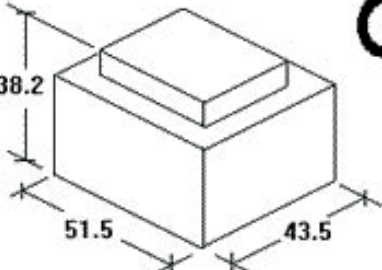


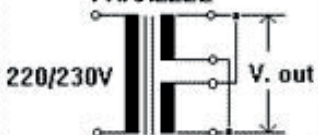

Transformers encapsulated in resin 6va

Trasformatori di alimentazione per elettronica. Primario 220Vac. Due secondari uguali che si possono collegare in serie od in parallelo. In serie si raddoppia la tensione con la possibilità di avere anche lo zero centrale, (es. 12-0-12V).

In questo caso il trasformatore fornisce la corrente di un avvolgimento.

Nel collegamento in parallelo si raddoppia la corrente e rimane invariata la tensione.

Power transformers for electronics. Primary 220Vac. Two secondary equal that can be connected in series or parallel. In series doubles the voltage with the possibility of having also the central zero, (eg 12-0-12V). In this case the transformer supplying the current of a winding. In parallel connection doubles the current and the voltage remains unchanged.

CONTENITORE BOX			FORATURA C.S. (vista da sotto) PERFORATION P.C. (view pin side) 	
POTENZA POWER 6VA	SCHEMI DI COLLEGAMENTO - CONNECTION SCHEME			
VOLT-CODICI VOLT-CODE	SERIE MASS 	PARALLELO PARALLEL 	ZERO CENTRALE CENTRAL ZERO 	
TENSIONI E CORRENTI MASSIME OTTENIBILI MAX GETTABLE CURRENTS AND VOLTAGES				
4,5+4,5V COD.020895	9V 0,650A	4,5V 1,300A	4,5-0-4,5V 0,650+0,650A	
6+6V COD.020896	12V 0,500A	6V 1,000A	6-0-6V 0,500+0,500A	
7,5+7,5V COD.020897	15V 0,400A	7,5V 0,800A	7,5-0-7,5V 0,400+0,400A	
9+9V COD.020898	18V 0,300A	9V 0,600A	9-0-9V 0,300+0,300A	
12+12V COD.020899	24V 0,250A	12V 0,500A	12-0-12V 0,250+0,250A	
15+15V COD.020900	30V 0,200A	15V 0,400A	15-0-15V 0,200+0,200A	
18+18V COD.020901	36V 0,150A	18V 0,300A	18-0-18V 0,150+0,150A	
24+24V COD.020902	48V 0,125A	24V 0,250A	24-0-24V 0,125+0,125A	