

Trasformatori da 2VA C.S. a vista


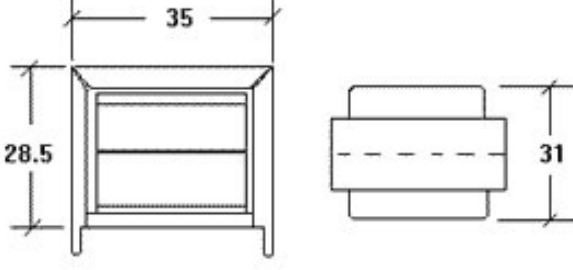

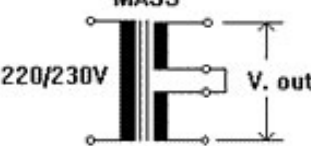
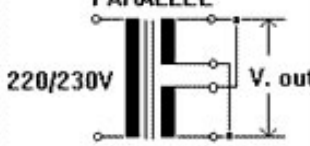

Transformers 2VA C.S.

Trasformatori di alimentazione per elettronica. Primario 220Vac. Due secondari uguali che si possono collegare in serie od in parallelo. In serie si raddoppia la tensione con la possibilità di avere anche lo zero centrale, (es. 12-0-12V).

In questo caso il trasformatore fornisce la corrente di un avvolgimento.

Nel collegamento in parallelo si raddoppia la corrente e rimane invariata la tensione.

Power transformers for electronics. Primary 220Vac. Two secondary equal that can be connected in series or parallel. In series doubles the voltage with the possibility of having also the central zero, (eg 12-0-12V). In this case the transformer supplying the current of a winding. In parallel connection doubles the current and the voltage remains unchanged.

			FORATURA C.S. PERFORATION P.C. 	
POTENZA POWER 2VA	SCHEMI DI COLLEGAMENTO - CONNECTION SCHEME			
VOLT-CODICI VOLT-CODE	SERIE MASS 	PARALLELO PARALLEL 	ZERO CENTRALE CENTRAL ZERO 	
TENSIONI E CORRENTI MASSIME OTTENIBILI MAX GETTABLE CURRENTS AND VOLTAGES				
4,5+4,5V COD.020297	9V 0,200A	4,5V 0,400A	4,5-0-4,5V 0,200+0,200A	
6+6V COD.020298	12V 0,150A	6V 0,300A	6-0-6V 0,150+0,150A	
7,5+7,5V COD.020299	15V 0,120A	7,5V 0,240A	7,5-0-7,5V 0,120+0,120A	
9+9V COD.020300	18V 0,100A	9V 0,200A	9-0-9V 0,100+0,100A	
12+12V COD.020301	24V 0,080A	12V 0,160A	12-0-12V 0,080+0,080A	
15+15V COD.020302	30V 0,060A	15V 0,120A	15-0-15V 0,060+0,060A	
18+18V COD.020303	36V 0,050A	18V 0,100A	18-0-18V 0,050+0,050A	
24+24V COD.020304	48V 0,040A	24V 0,080A	24-0-24V 0,040+0,040A	